

DAA.DAB 式 (雙閉式快速接頭)


型 號		02	03	04	06
規 格		1/4"	3/8"	1/2"	3/4"
材 質		銅 BSBM / 不鏽鋼 SUS 304			
連接方式	母體	內牙 (F)			
	子體				
工作壓力 / 最大工作壓力	銅	50 / 75 (kgf/cm ²) 4.9 / 7.4 (MPa) 711 / 1067 (psi) 49 / 74 (bar)		30 / 45 (kgf/cm ²) 2.9 / 4.4 (MPa) 427 / 640 (psi) 29 / 44 (bar)	
	不鏽鋼	75 / 100 (kgf/cm ²) 7.4 / 9.8 (MPa) 1067 / 1422 (psi) 74 / 98 (bar)		45 / 65 (kgf/cm ²) 4.4 / 6.4 (MPa) 640 / 925 (psi) 44 / 64 (bar)	
密封件材質 工作溫度範圍	標準	HNBR: -20°C ~ +120°C (-4°F ~ +248°F)			
	特殊	VITON: -20°C ~ +180°C (-4°F ~ +356°F)			
適合流體		液壓油 / 水 / 空氣 / 真空			
適用範圍		油壓機器, 工程機械, 農業機械			

 兩路開閉式


	母插座 (S)	公插頭 (P)
DA TYPE		
DAA TYPE		
DAB TYPE		

注意：DA、DAA、DAB 不能混合對接使用

DAA 式

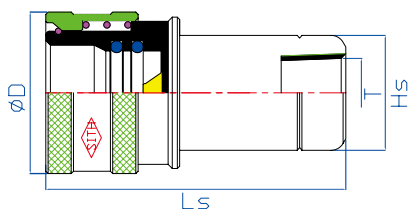


電腦編號	製品 記號	尺寸 (mm)			
		Ls	D	Hs	T
A2235DAAJA	02SF				
A2235DAAJA	03SF	65	35	21 對邊 *16L	PT3/8"19P
A2235DAAJA	04SF				
A2235DAAJA	06SF				




電腦編號	製品 記號	尺寸 (mm)			
		Lp	C	Hp	T
A2235DAAJA	02PF				
A2235DAAJA	03PF	40	25	Ø22.9*6 角 21 對邊	PT3/8"19P
A2235DAAJA	04PF				
A2235DAAJA	06PF				

DAB 式

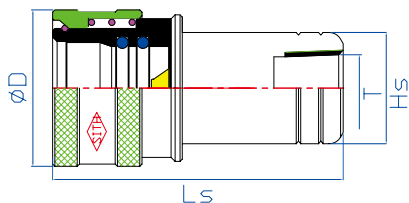

電腦編號	製品 記號	尺寸 (mm)			
		Ls	D	Hs	T
A2235DABJA	02SF				
A2235DABJA	03SF	65	35	21 對邊 *16L	PT3/8"19P
A2235DABJA	04SF				
A2235DABJA	06SF				



電腦編號	製品 記號	尺寸 (mm)			
		Lp	C	Hp	T
A2235DABJA	02PF				
A2235DABJA	03PF	40	26	Ø22.9*6 角 21 對邊	PT3/8"19P
A2235DABJA	04PF				
A2235DABJA	06PF				

尺寸 T: 除了 PT 之外, 另有 NPT 或 BSP 等 (歡迎訂製特殊螺紋)