




CPV-CNV TYPE DOUBLE SHUT-OFF QUICK COUPLING

Model		03	04	08
Size		3/8"	1/2"	1"
Material		Carbon Steel		
Connection method	Socket	Male screw [M]		
	Plug			
Working pressure / Max. working pressure		210 / 350 (kgf/cm ²) 20.6 / 34.3 (MPa) 2987 / 4978 (psi) 206 / 343 (bar)		
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)		
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F)		
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum		
Use		Hydraulic machine, Construction machinery, Agricultural machinery		

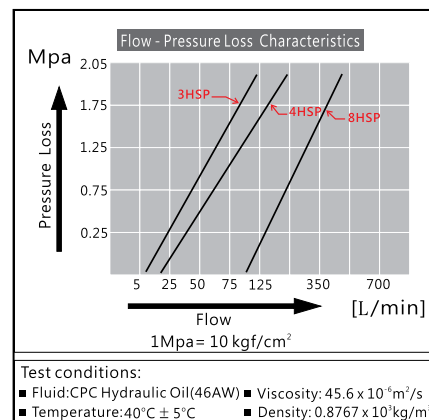

(Socket) Dimension T & A Computer No:


A8115CPV - 04PB - 03L30

Dimension: A (Ex: 30mm length = L30)

Sign L


Dimension: T (Thread Size)

Sign	02	03	04	06	08
Meaning	1/4"	3/8"	1/2"	3/4"	1"

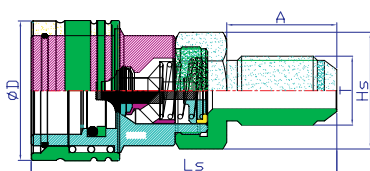


It is up to the ISO-8434-2 Standard

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8115CPV	03PU03L30	79	30.2	Ø30*6HEX*27D	30	9/16**UNF
A8115CPV	04PU04L17	73.3	38.2	Ø33*6HEX*30D	17	3/4**UNF
A8115CPV	04PU04L30	86.3	38.2	Ø33*6HEX*30D	30	3/4**UNF
A8115CPV	08PU08L24	111	53.3	Ø52*6HEX*46D	24	1-5/16**UNF



It is up to the ISO-8434-1, ISO-8434-1-S Standard

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8115CPV	03PM14L13	62	30.2	Ø30*6HEX*27D	13	M14*1.5P
A8115CPV	04PM18L13	69.3	38.2	Ø33*6HEX*30D	13	M18*1.5P
A8115CPV	04PM24L30	86.3	38.2	Ø33*6HEX*30D	30	M24*1.5P
A8115CPV	08PM30L30	117	53.3	Ø52*6HEX*46D	30	M30*1.5P

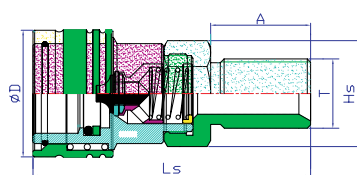

It is up to the DIN-3863 Standard


Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8115CPV	03PB03L13	62	30.2	Ø30*6HEX*27D	13	BSP 3/8"19P
A8115CPV	03PN03L13	62	30.2	Ø30*6HEX*27D	13	NPT 3/8"18P
A8115CPV	03PT03L13	62	30.2	Ø30*6HEX*27D	13	PT 3/8"19P
A8115CPV	04PB03L30	86.3	38.2	Ø33*6HEX*30D	30	BSP 3/8"19P
A8115CPV	04PB04L30	86.3	38.2	Ø33*6HEX*30D	30	BSP 1/2"14P
A8115CPV	08PT08L24	110.5	53.3	Ø52*6HEX*46D	23.5	PT 1"11P

Dimension of A and T can be customized.

CPV-CNV TYPE DOUBLE SHUT-OFF QUICK COUPLING


Model		03	04	08
Size		3/8"	1/2"	1"
Material		Carbon Steel		
Connection method	Socket	Male screw [M]		
	Plug			
Working pressure / Max. working pressure		210 / 350 (kgf/cm ²) 20.6 / 34.3 (MPa) 2987 / 4978 (psi) 206 / 343 (bar)		
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)		
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F)		
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum		
Use		Hydraulic machine, Construction machinery, Agricultural machinery		

Double Shut-off

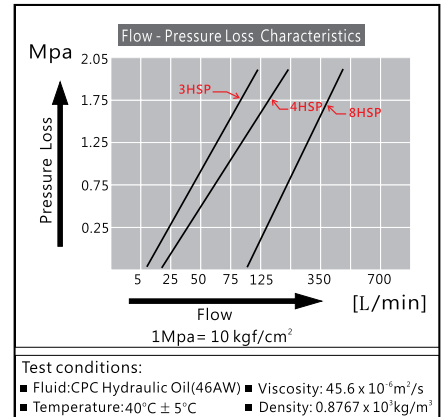


(Plug) Dimension T & A Computer No:
A8115CNV - 04PB - 03L30

Dimension: A (Ex: 30mm length = L30)					
Sign	L				
Dimension: T (Thread Size)					
Sign	02	03	04	06	08
Meaning	1/4"	3/8"	1/2"	3/4"	1"

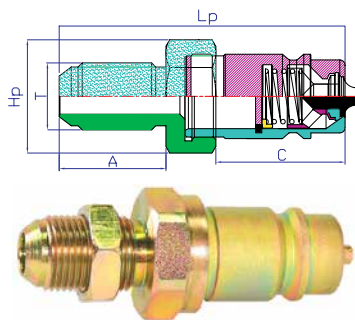


It is up to the ISO-8434-2 Standard

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8115CNV	03PU03L30	70.6	28.4	Ø30*6HEX*27D	30	9/16**UNF
A8115CNV	04PU04L17	58	27	Ø33*6HEX*30D	17	3/4**UNF
A8115CNV	04PU04L30	71	27	Ø33*6HEX*30D	30	3/4**UNF
A8115CNV	08PU08L24	88	46.6	Ø52*6HEX*46D	24	1-5/16**UNF

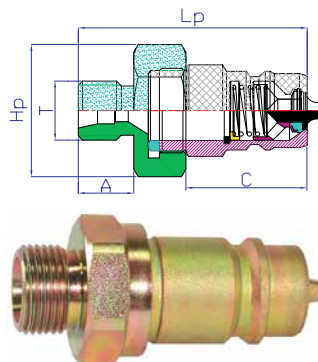

It is up to the ISO-8434-1, ISO-8434-1-S Standard

Computer No	Product Sign	Dimension (mm)				
		Lp	C	Hp	A	T
A8115CNV	03PM14L13	53.6	28.4	Ø30*6HEX*27D	13	M14*1.5P
A8115CNV	04PM18L13	54	27	Ø33*6HEX*30D	13	M18*1.5P
A8115CNV	04PM24L30	71	27	Ø33*6HEX*30D	30	M24*1.5P
A8115CNV	08PM30L30	94	46.6	Ø52*6HEX*46D	30	M30*1.5P

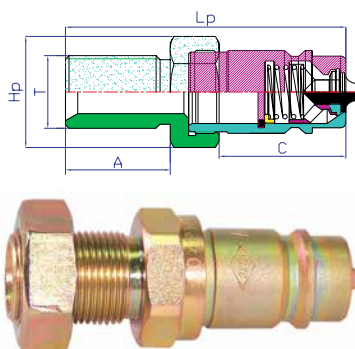

It is up to the DIN-3863 Standard

Computer No	Product Sign	Dimension (mm)				
		Lp	C	Hp	A	T
A8115CNV	03PB03L13	53.6	28.4	Ø30*6HEX*27D	13	BSP 3/8"19P
A8115CNV	03PN03L13	53.6	28.4	Ø30*6HEX*27D	13	NPT 3/8"18P
A8115CNV	03PT03L13	53.6	28.4	Ø30*6HEX*27D	13	PT 3/8"19P
A8115CNV	04PB03L30	71	27	Ø33*6HEX*30D	30	BSP 3/8"19P
A8115CNV	04PB04L30	71	27	Ø33*6HEX*30D	30	BSP 1/2"14P
A8115CNV	08PT08L24	87.5	46.6	Ø52*6HEX*46D	23.5	PT 1"11P

Dimension of A and T can be customized.