




DAA.DAB TYPE DOUBLE SHUT-OFF QUICK COUPLING

Model		02	03	04	06
Size		1/4"	3/8"	1/2"	3/4"
Material		Brass BSBM / Stainless Steel SUS 304			
Connection method	Socket	Female screw [F]			
	Plug				
Working pressure / Max. working pressure	Brass	50 / 75 (kgf/cm ²) 4.9 / 7.4 (MPa) 711 / 1067 (psi) 49 / 74 (bar)		30 / 45 (kgf/cm ²) 2.9 / 4.4 (MPa) 427 / 640 (psi) 29 / 44 (bar)	
	Stainless Steel	75 / 100 (kgf/cm ²) 7.4 / 9.8 (MPa) 1067 / 1422 (psi) 74 / 98 (bar)		45 / 65 (kgf/cm ²) 4.4 / 6.4 (MPa) 640 / 925 (psi) 44 / 64 (bar)	
Seal material: Working temperature range	Standard	HNBR: -20°C ~ +120°C (-4°F ~ +248°F)			
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F)			
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum			
Use		Hydraulic machine, Construction machinery, Agricultural machinery			

	Socket (S)	Plug (P)
DA TYPE		
DAA TYPE		
DAB TYPE		

Notice: DA Type and DAA Type and DAB Type non interchangeable


DAA TYPE

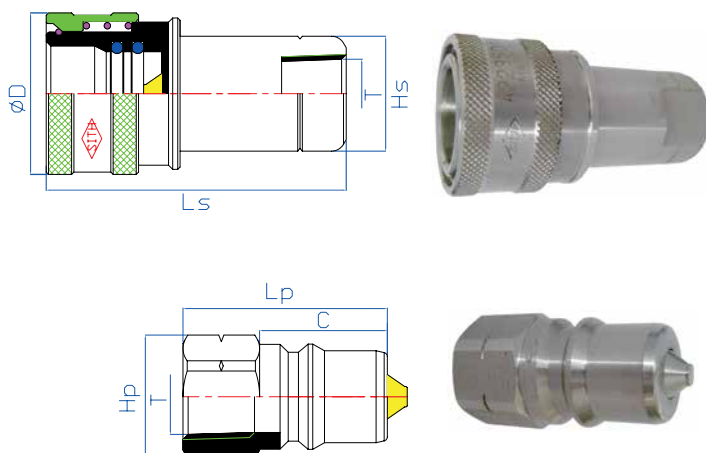

Computer No	Product Sign	Dimension (mm)			
		Ls	D	Hs	T
A2235DAAJA	02SF				
A2235DAAJA	03SF	65	35	21D*16L	PT3/8"19P
A2235DAAJA	04SF				
A2235DAAJA	06SF				

Computer No	Product Sign	Dimension (mm)			
		Lp	C	Hp	T
A2235DAAJA	02PF				
A2235DAAJA	03PF	40	25	Ø22.9*6HEX*21D	PT3/8"19P
A2235DAAJA	04PF				
A2235DAAJA	06PF				

DAB TYPE

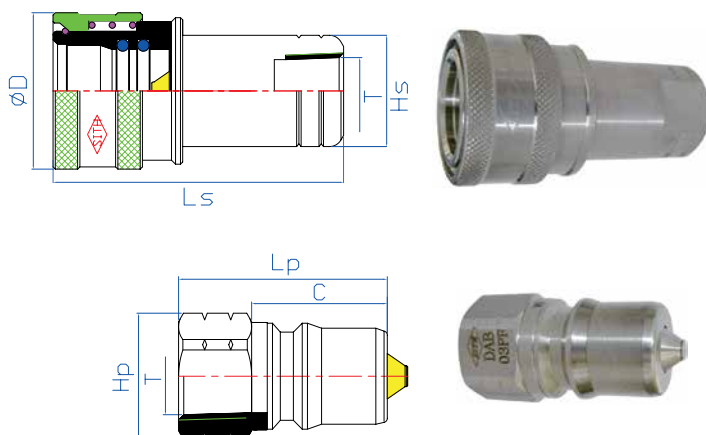

Computer No	Product Sign	Dimension (mm)			
		Ls	D	Hs	T
A2235DABJA	02SF				
A2235DABJA	03SF	65	35	21D*16L	PT3/8"19P
A2235DABJA	04SF				
A2235DABJA	06SF				

Computer No	Product Sign	Dimension (mm)			
		Lp	C	Hp	T
A2235DABJA	02PF				
A2235DABJA	03PF	40	26	Ø22.9*6HEX*21D	PT3/8"19P
A2235DABJA	04PF				
A2235DABJA	06PF				

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)