




JOIN BRASS ENTERPRISE CO.,LTD.

FN TYPE FLAT FACE QUICK COUPLING


It is up to the ISO 16028 Standard

Double Shut-off

Model		02	03	04	0406	06	08
Size		1/4"	3/8"	1/2"	1/2"	3/4"	1"
Material		Carbon Steel					
Connection method	Socket	Female screw [F] / Male screw [M]					
	Plug						
Working pressure / Max. working pressure		210 / 350 (kgf/cm ²) 20.6 / 34.3 (MPa) 2987 / 4978 (psi) 206 / 343 (bar)					
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)					
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F)					
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum					
Use		Hydraulic machine, Construction machinery, Agricultural machinery					

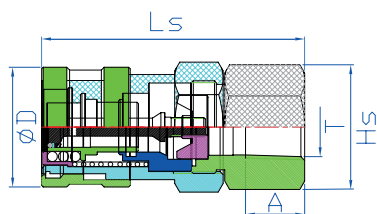

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8115FNMA	02SF	48.1	28	Ø23.6*6HEX*22D	12	PT1/4"19P
A8115FNMA	03SF	67	30.6	Ø25.4*6HEX*27.7D	17.8	PT3/8"19P
A8115FNMA	04SF	84.1	38.5	Ø38.2*6HEX*35D	19	PT1/2"14P
A8115FNMA	0406SF	84.1	38.5	Ø38.2*6HEX*35D	19	PT3/4"14P
A8115FNMA	0406SFS	84.1	38.5	Ø38.2*6HEX*35D	19	BSP3/4"14P
A8115FNMA	0406SG	84.1	38.5	Ø38.2*6HEX*35D	19	1"-12UNF
A8115FNMA	06SF	91	46.6	Ø48.7*6HEX*44D	15.8	PT3/4"14P
A8115FNMA	08SF	104.9	57.2	Ø55.8*6HEX*50.8D	25	PT 1"11P



Computer No	Product Sign	Dimension (mm)				
		Lp	C	Hp	A	T
A8115FNMA	02PF	48.1	36	Ø23.6*6HEX*22D	11.8	PT1/4"19P
A8115FNMA	03PF	56	39.3	Ø25.9*6HEX*24D	12.7	PT3/8"19P
A8115FNMA	04PF	72.8	46.7	Ø38.2*6HEX*35D	23.2	PT1/2"14P
A8115FNMA	0406PF	72.8	46.7	Ø38.2*6HEX*35D	23.2	PT3/4"14P
A8115FNMA	0406PFS	72.8	46.7	Ø38.2*6HEX*35D	23.2	BSP3/4"14P
A8115FNMA	0406PG	72.8	46.7	Ø38.2*6HEX*35D	23.2	1"-12UNF
A8115FNMA	06PF	84.4	57.7	Ø45.6*6HEX*41D	24	PT3/4"14P
A8115FNMA	08PF	91	64.7	Ø52.3*6HEX*47.5D	25	PT 1"11P

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)