





JOIN BRASS ENTERPRISE CO., LTD.


FV TYPE DOUBLE SHUT-OFF QUICK COUPLING

Model		04	06	08	10	12	16
Size		1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Material		Carbon Steel					
Connection method	Socket	Female screw [F]					
	Plug						
Working pressure / Max. working pressure		210 / 350 (kgf/cm ²) 20.6 / 34.3 (MPa) 2987 / 4978 (psi) 206 / 343 (bar)			183 / 270 (kgf/cm ²) 17.9 / 26.5 (MPa) 2603 / 3840 (psi) 179 / 265 (bar)		
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)					
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F)					
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum					
Use		Hydraulic machine, Construction machinery, Agricultural machinery					

Double Shut-off

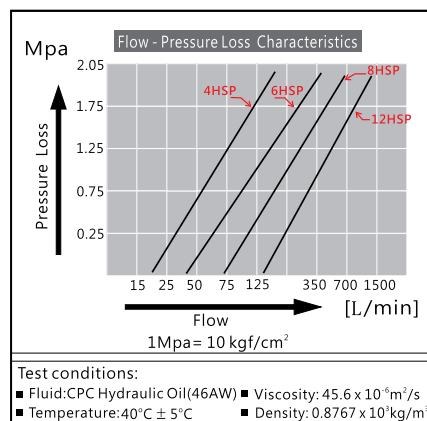

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8105FVMA	04SF	75	1"1/8PS*11P	Ø33.4*6HEX*30D	17	PT1/2"14P
A8105FVMA	06SF	91	1"1/4PS*11P	Ø37.6*6HEX*34D	17.7	PT3/4"14P
A8105FVMA	08SF	88.5	1"5P	Ø46*2TS*40D	19.3	PT 1"11P
A8105FVMA	10SF	105	1"5P	Ø52*2TS*48D	23	PT1-1/4"11P
A8105FVMA	12SF	108	1"6P	Ø64*2TS*58D	22	PT1-1/2"11P
A8105FVMA	16SF	130	1"5P	Ø84.9*2TS*80D	28	PT 2"11P



Computer No	Product Sign	Dimension (mm)				
		Lp	C	Hp	A	T
A8105FVMA	04PF	55.1	30.3	Ø46.9*6HEX*42D	17	PT1/2"14P
A8105FVMA	06PF	62.7	36.3	Ø56.2*6HEX*50D	17.7	PT3/4"14P
A8105FVMA	08PF	61	30.3	Ø64.5*6HEX*60D	21	PT 1"11P
A8105FVMA	10PF	70	35.5	Ø78.5*6HEX*70D	23	PT1-1/4"11P
A8105FVMA	12PF	73	35	Ø89.5*6HEX*80D	22	PT1-1/2"11P
A8105FVMA	16PF	86.1	44.2	Ø135	28	PT 2"11P

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)