
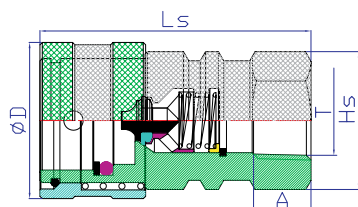



HD TYPE DOUBLE SHUT-OFF QUICK COUPLING

Model		02	03	04	06	08
Size		1/4"	3/8"	1/2"	3/4"	1"
Material		Stainless Steel SUS 420				
Connection method	Socket	Female screw [F]				
	Plug					
Working pressure / Max. working pressure		210 / 350 (kgf/cm ²) 20.6 / 34.3 (MPa) 2987 / 4978 (psi) 206 / 343 (bar)				
Seal material: Working temperature range	Standard	VITON: -20°C ~ +180°C (-4°F ~ +356°F)				
	Optional	NBR: -20°C ~ +80°C (-4°F ~ +176°F)				
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum				
Use		Hydraulic machine, Construction machinery, Agricultural machinery				

 Double Shut-off

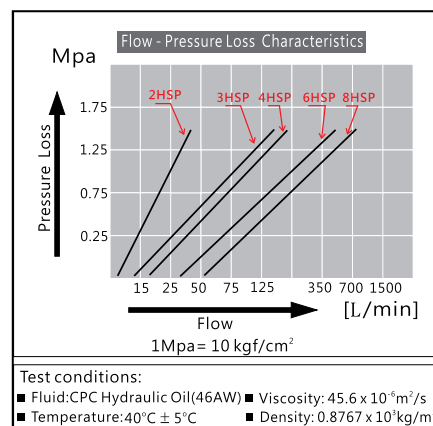

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A9375HDMA	02SF	49.6	27	Ø24*6HEX*22D	12	BSP1/4"19P
A9375HDMA	03SF	59	34	Ø30*6HEX*27D	12.8	BSP3/8"19P
A9375HDMA	04SF	69	40	Ø34*6HEX*30D	19	BSP1/2"14P
A9375HDMA	06SF	82.5	48	Ø43*6HEX*39D	17	BSP3/4"14P
A9375HDMA	08SF	94.8	51.6	Ø48*6HEX*44D	21	BSP 1"11P



Computer No	Product Sign	Dimension (mm)				
		Lp	C	Hp	A	T
A9375HDMA	02PF	32	19.2	Ø20.9*6HEX*19D	12	BSP1/4"19P
A9375HDMA	03PF	38	26	Ø26*6HEX*23D	12.8	BSP3/8"19P
A9375HDMA	04PF	45	31	Ø31*6HEX*27D	14	BSP1/2"14P
A9375HDMA	06PF	53	37	Ø39*6HEX*35D	17	BSP3/4"14P
A9375HDMA	08PF	61	42.3	Ø47*6HEX*41D	21	BSP 1"11P

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)