






TS TYPE (CAR WASH MACHINE QUICK COUPLING)

Model		01	02	03
Size		1/8"	1/4"	3/8"
Material		Steel[Zinc plated] SC / Brass BSBM / Stainless Steel SUS 304		
Connection method	Socket	Female screw [F] / Male screw [M]		
	Plug			
Working pressure / Max. working pressure	Steel	75 / 100 (kgf/cm ²) 1067 / 1422 (psi)		7.4 / 9.8 (MPa) 74 / 98 (bar)
	Brass	50 / 75 (kgf/cm ²) 711 / 1067 (psi)		4.9 / 7.4 (MPa) 49 / 74 (bar)
	Stainless Steel	75 / 100 (kgf/cm ²) 1067 / 1422 (psi)		7.4 / 9.8 (MPa) 74 / 98 (bar)
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)		
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F) CR: -20°C ~ +80°C (-4°F ~ +176°F)		
Applicable fluid		Hydraulic Oil / Air / Water		
Use		Car wash machine, Machine tool cutting oil piping		

→↔← Straight through

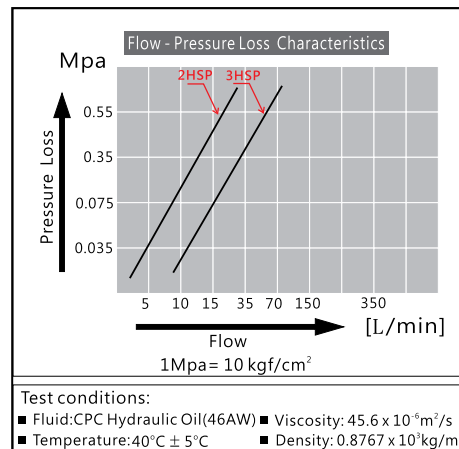

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
SUS A2375TSMA	01SF	25.3	16	Ø16.2*6HEX*14D	10.4	PT1/8"28P
BRASS A0175TSMA	02SF	36.1	25	Ø24*6HEX*21D	13	PT1/4"19P
STEEL A1175TSMA	03SF	40.4	29	Ø28.6*6HEX*25D	15.4	PT3/8"19P

Computer No	Product Sign	Dimension (mm)					
		Lp	C	Hp	A	T	Bp
SUS A2375TSMA	02PF	37	21.6	Ø19.6*6HEX*17D	12.3	PT1/4"19P	5.2
BRASS A0175TSMA	03PF	39	22	Ø24.2*6HEX*21D	13.8	PT3/8"19P	12.2

Computer No	Product Sign	Dimension (mm)					
		Lp	C	Hp	A	T	Bp
SUS A2375TSMA	01PM	26.7	11.6	Ø16.2*6HEX*11D	10.1	PT1/8"28P	4
BRASS A0175TSMA	02PM	37.5	21.6	Ø19.6*6HEX*17D	11	PT1/4"19P	5.1

Computer No	Product Sign	Dimension (mm)			
		Lp	C	Hp	Bp
SUS A2375TSMA	02UU	49.2	21.6	14	5.1

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)