

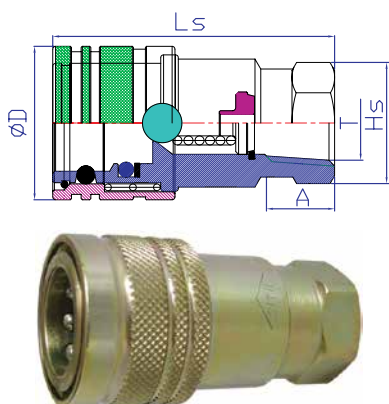


NS TYPE DOUBLE SHUT-OFF QUICK COUPLING


It is up to the ISO 7241 Series A Standard

 Double Shut-off

Model		02	03	04	06	08
Size		1/4"	3/8"	1/2"	3/4"	1"
Material		Carbon Steel				
Connection method	Socket	Female screw [F]				
	Plug					
Working pressure / Max. working pressure		210 / 350 (kgf/cm ²) 20.6 / 34.3 (MPa) 2987 / 4978 (psi) 206 / 343 (bar)				
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)				
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F)				
Applicable fluid		Hydraulic Oil / Air / Water / Vacuum				
Use		Hydraulic machine, Construction machinery, Agricultural machinery				

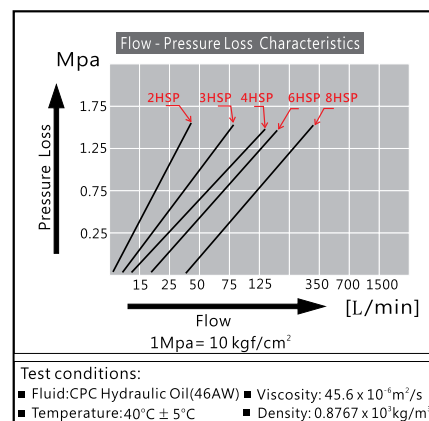

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
A8115NSMA	02SF	49.6	27	Ø21*6HEX*19D	12	PT1/4"19P
A8115NSMA	03SF	55.8	30.2	Ø24.5*6HEX*22D	12.5	PT3/8"19P
A8115NSMA	04SF	67	38.2	Ø30*6HEX*27D	17	PT1/2"14P
A8115NSMA	06SF	79.4	45	Ø38*6HEX*34D	17.7	PT3/4"14P
A8115NSMA	08SF	99.1	53.3	Ø45*6HEX*41D	20	PT 1"11P

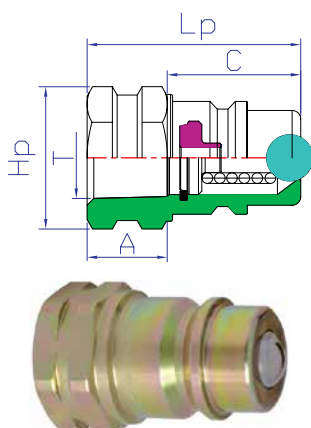

Computer No	Product Sign	Dimension (mm)				
		Lp	C	Hp	A	T
A8115NSMA	02PF	32	19.2	Ø21*6HEX*19D	12	PT1/4"19P
A8115NSMA	03PF	38	24	Ø24.5*6HEX*22D	12.5	PT3/8"19P
A8115NSMA	04PF	44	31	Ø30*6HEX*27D	17	PT1/2"14P
A8115NSMA	06PF	52	35	Ø38*6HEX*34D	17.7	PT3/4"14P
A8115NSMA	08PF	65.6	47.6	Ø45*6HEX*41D	20	PT 1"11P

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)