






JOIN BRASS ENTERPRISE CO., LTD.

TP TYPE (CAR WASH MACHINE QUICK COUPLING)


Model		03	
Size		3/8"	
Material		Steel[Zinc plated] SC / Brass BSBM / Stainless Steel SUS 304	
Connection method	Socket	Female screw [F] / Male screw [M]	
	Plug		
Working pressure / Max. working pressure	Steel	75 / 100 (kgf/cm ²) 1067 / 1422 (psi)	7.4 / 9.8 (MPa) 74 / 98 (bar)
	Brass	50 / 75 (kgf/cm ²) 711 / 1067 (psi)	4.9 / 7.4 (MPa) 49 / 74 (bar)
	Stainless Steel	75 / 100 (kgf/cm ²) 1067 / 1422 (psi)	7.4 / 9.8 (MPa) 74 / 98 (bar)
	Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F) CR: -20°C ~ +80°C (-4°F ~ +176°F)	
Applicable fluid		Hydraulic Oil / Air / Water	
Use		Car wash machine, Machine tool cutting oil piping	

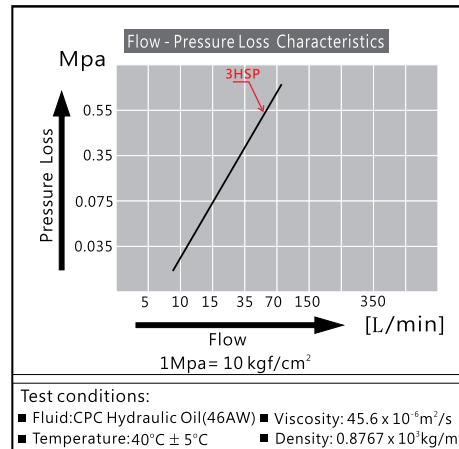

Computer No	Product Sign	Dimension (mm)				
		Ls	D	Hs	A	T
SUS A2375TPMA BRASS A0175TPMA STEEL A1175TPMA	03SF	40	35.2	Ø34.4*6HEX*30D	12.5	PT3/8"19P



Computer No	Product Sign	Dimension (mm)					
		Lp	C	Hp	A	T	Bp
SUS A2375TPMA BRASS A0175TPMA STEEL A1175TPMA	03PF	38.1	26.8	Ø24.6*6HEX*22D	12	PT3/8"19P	13.5



Computer No	Product Sign	Dimension (mm)					
		Lp	C	Hp	A	T	Bp
SUS A2375TPMA BRASS A0175TPMA STEEL A1175TPMA	03PM	48	26.8	Ø24.6*6HEX*22D	13.2	PT3/8"19P	13.5

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)