




WA TYPE (ONE-HAND QUICK COUPLING)

Model		10	20	25	30	40
Size		1/8"	1/4"	5/16"	3/8"	1/2"
Material		Brass BSBM				
Connection method	Socket	Female screw [F] / Male screw [M] / Hose nipple [H]				
	Plug					
Working pressure / Max. working pressure		10 / 15 (kgf/cm ²) 142 / 213 (psi)		1.0 / 1.5 (MPa) 10 / 15 (bar)		
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)				
	Optional	SI: -40°C ~ +200°C (-40°F ~ +392°F) VITON: -20°C ~ +180°C (-4°F ~ +356°F)				
Applicable fluid		Oil / Air / Water				
Use		Mold specific, Mold coolant hoses				


Single Shut-off

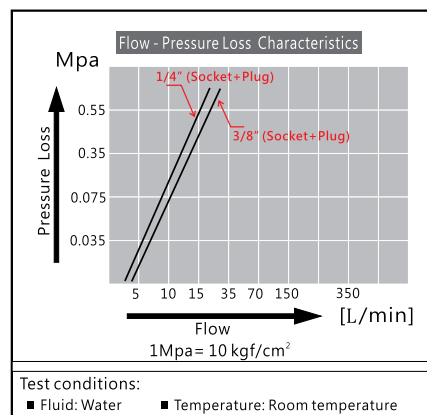


Computer No	Product Sign	Dimension (mm)				
		Ls	D	Cs	A	T
A0135WADA	25SH	59.6	24	20.5	23.5	9
A0135WADA	30SH	61	24	20.5	24.9	11.2
A0135WADA	40SH	61	24	20.5	24.9	14.2




Computer No	Product Sign	Dimension (mm)			
		Ls	D	Cs	T
A0135WADA	20SF	48.2	24	Ø24*6HEX*21D	PT1/4"19P
A0135WADA	30SF	50.2	24	Ø24*6HEX*21D	PT3/8"19P



Computer No	Product Sign	Dimension (mm)			
		Ls	D	Cs	T
A0135WADA	30SG	57.7	24	Ø24*6HEX*21D	9/16"18P



Computer No	Product Sign	Dimension (mm)				
		Lp	Hp	C	T	Bp
A0135WADA	10PM	29	Ø16*6HEX*14D	14	PT1/8"28P	8.6
A0135WADA	20PM	29	Ø16*6HEX*14D	14	PT1/4"19P	8.6
A0135WADA	30PM	31.5	Ø19.5*6HEX*17D	14	PT3/8"19P	8.6
A0135WADA	40PM	32	Ø24*6HEX*21D	14	PT1/2"14P	8.6



Computer No	Product Sign	Dimension (mm)				
		Lp	Hp	C	T	Bp
A0135WADA	30AT	28.5	Ø16*6HEX*14D	14	3/8"xP16	8.6
A0135WADA	40AT	29	Ø16*6HEX*14D	14	1/2"xP12	8.6

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)