






JOIN BRASS ENTERPRISE CO.,LTD.

WB TYPE (ONE-HAND QUICK COUPLING)


Model		10	20	25	30	40
Size		1/8"	1/4"	5/16"	3/8"	1/2"
Material		Brass BSBM				
Connection method	Socket	Female screw [F] / Male screw [M] / Hose nipple [H]				
	Plug					
Working pressure / Max. working pressure		10 / 15 (kgf/cm ²) 142 / 213 (psi)		1.0 / 1.5 (MPa) 10 / 15 (bar)		
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)				
	Optional	SI: -40°C ~ +200°C (-40°F ~ +392°F) VITON: -20°C ~ +180°C (-4°F ~ +356°F)				
Applicable fluid		Oil / Air / Water				
Use		Mold specific, Mold coolant hoses				

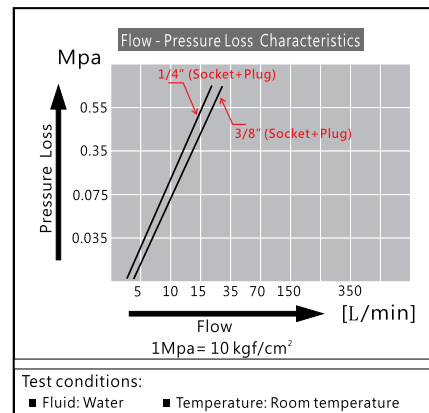


Computer No	Product Sign	Dimension (mm)				
		Ls	D	Cs	A	T
A0135WBDA	25SH	46	18	Ø17.4*6HEX*16D	17	9
A0135WBDA	30SH	47	18	Ø17.4*6HEX*16D	17	10.1
A0135WBDA	40SH	47	18	15.9	17	14.2




Computer No	Product Sign	Dimension (mm)			
		Ls	D	Cs	T
A0135WBDA	20SF	33	18	Ø19.5*6HEX*17D	PT1/4"19P




Computer No	Product Sign	Dimension (mm)			
		Ls	D	Cs	T
A0135WBDA	20SM	39	18	Ø19.5*6HEX*17D	PT1/4"19P




Computer No	Product Sign	Dimension (mm)			
		Ls	D	Cs	T
A0135WBDA	30SG	47.5	18	Ø19.5*6HEX*17D	9/16"18P



Computer No	Product Sign	Dimension (mm)			
		Ls	D	Cs	T
A0135WBDA	30SP	50.4	18	Ø19.5*6HEX*17D	6.5*10



Computer No	Product Sign	Dimension (mm)				
		Lp	Hp	C	T	Bp
A0135WBDA	10PM	28	Ø11.5*6HEX*10D	13	PT1/8"28P	5
A0135WBDA	20PM	28	Ø16*6HEX*14D	13	PT1/4"19P	5
A0135WBDA	30PM	30.5	Ø19.5*6HEX*17D	13	PT3/8"19P	5
A0135WBDA	40PM	31	Ø24*6HEX*21D	13	PT1/2"14P	5



Computer No	Product Sign	Dimension (mm)				
		Lp	Hp	C	T	Bp
A0135WBDA	30AT	27.5	Ø11.5*6HEX*10D	13	3/8"xP16	5
A0135WBDA	40AT	28	Ø16*6HEX*14D	13	1/2"xP12	5

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)